

BINOTTO MF-RP - CYLINDERS

Binotto®




THE TIPPING POWER

TYPE :

TIPPING WEIGHT¹ :

MF 145-4-4500 RP - D₂ 1451

26 - 38 Tons

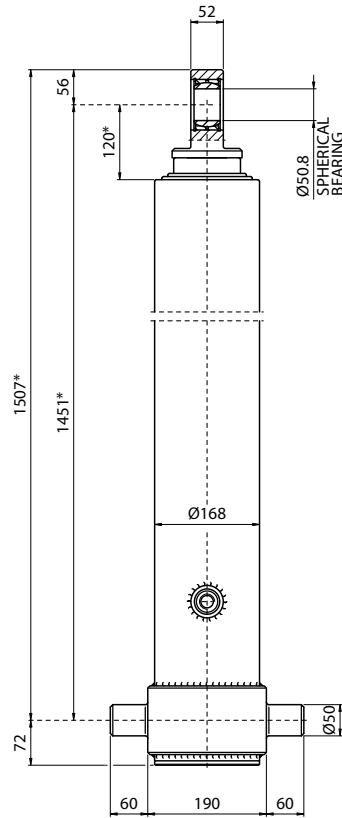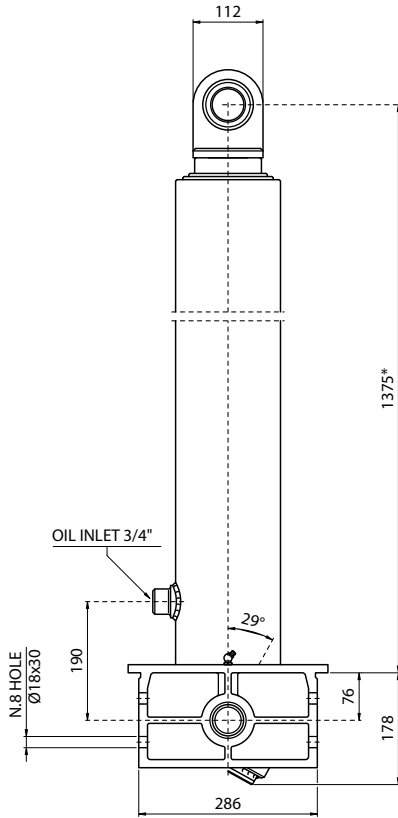

| STAGES [N] | EFF. DIAMETER [MM] | THRUST AT 200 BAR [TON] | STROKE [MM] |
|-----------------|-------------------------|------------------------------|------------------|
| I | Ø 145 | 33.0 | 1125 |
| II | Ø 126 | 24.9 | 1125 |
| III | Ø 107 | 18.0 | 1125 |
| IV | Ø 088 | 12.2 | 1125 |
| V | | | |
| VI | | | |

SPECIFICATION :

Type cylinder : **MF 145-4-4500 RP - D₂ 1451**
 Stages number : 04
 Stroke : 4500 mm
 Weight cylinder only : 178 Kgs.
 Weight including brackets : 203 Kgs.
 Working volume : 050 Ltrs.
 Max. working pressure : **200** bar
 Oil : see oil specification sheet

¹ : Tipping weight = net weight body + payload.
 Fitted centres (*) = closed centres plus 20mm pull out.

REMARKS :

BRACKETS KIT (NOT INCLUDED)

| CODE | DESCRIPTION | Q.TY |
|---------|--------------------------------|------|
| SIL#MDC | Lower bracket - pin Ø 50 / 286 | 02 |

BRACKETS MOUNTING KIT (NOT INCLUDED)

| CODE | DESCRIPTION |
|----------|--|
| KFSI#001 | Lower brackets mounting kit (16 - M16 x 1.5 x 50 mm) |