

BINOTTO MF-RP - CYLINDERS

Binotto®




THE TIPPING POWER

TYPE :

TIPPING WEIGHT¹ :

MF 165-5-6125 RP - D₂ 1545

38 - 42 Tons

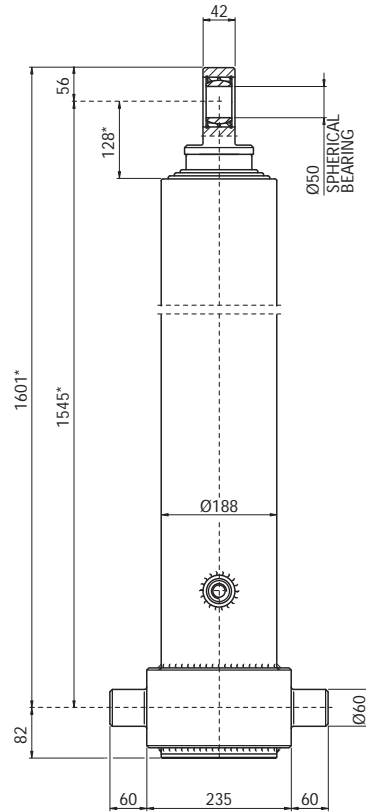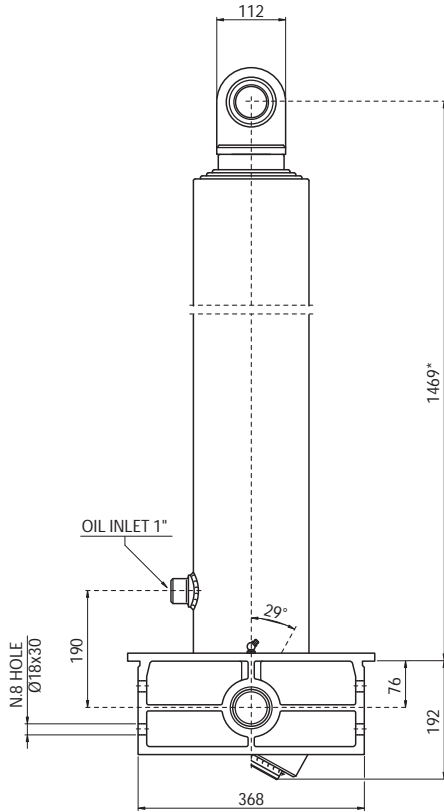

| STAGES [N] | EFF. DIAMETER [MM] | THRUST AT 200 BAR [TON] | STROKE [MM] |
|-----------------|-------------------------|------------------------------|------------------|
| I | Ø 165 | 42.8 | 1225 |
| II | Ø 145 | 33.0 | 1225 |
| III | Ø 126 | 24.9 | 1225 |
| IV | Ø 107 | 18.0 | 1225 |
| V | Ø 088 | 12.2 | 1225 |
| VI | | | |

SPECIFICATION :

Type cylinder : **MF 165-5-6125 RP - D₂ 1545**
 Stages number : 05
 Stroke : 6125 mm
 Weight cylinder only : 260 Kgs.
 Weight including brackets : 290 Kgs.
 Working volume : 080 Ltrs.
 Max. working pressure : **200** bar
 Oil : see oil specification sheet

¹ : Tipping weight = net weight body + payload.
 Fitted centres (*) = closed centres plus 20mm pull out.

REMARKS :

BRACKETS KIT (NOT INCLUDED)

| CODE | DESCRIPTION | Q.TY |
|---------|--------------------------------|------|
| SIL#MIC | Lower bracket - pin Ø 60 / 368 | 02 |

BRACKETS MOUNTING KIT (NOT INCLUDED)

| CODE | DESCRIPTION |
|----------|--|
| KFSI#001 | Lower brackets mounting kit (16 - M16 x 1.5 x 50 mm) |